
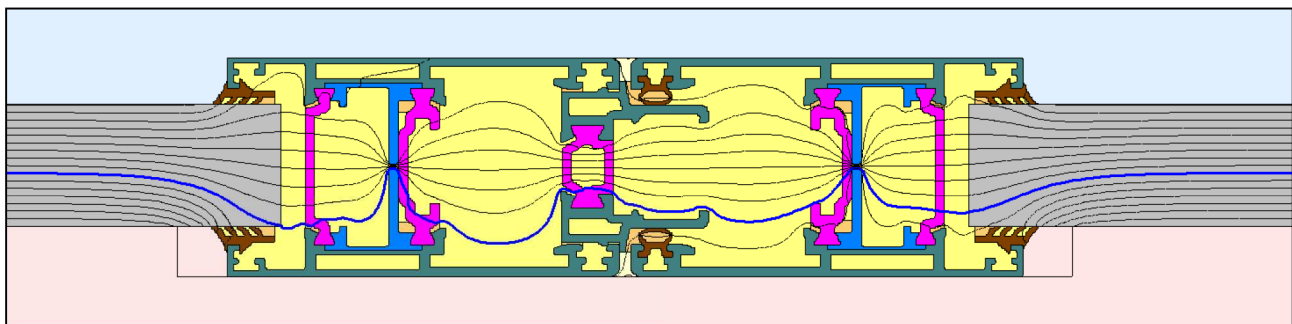


**NRG 4000, Profil #1**

**Drawing** (Source: Customer):


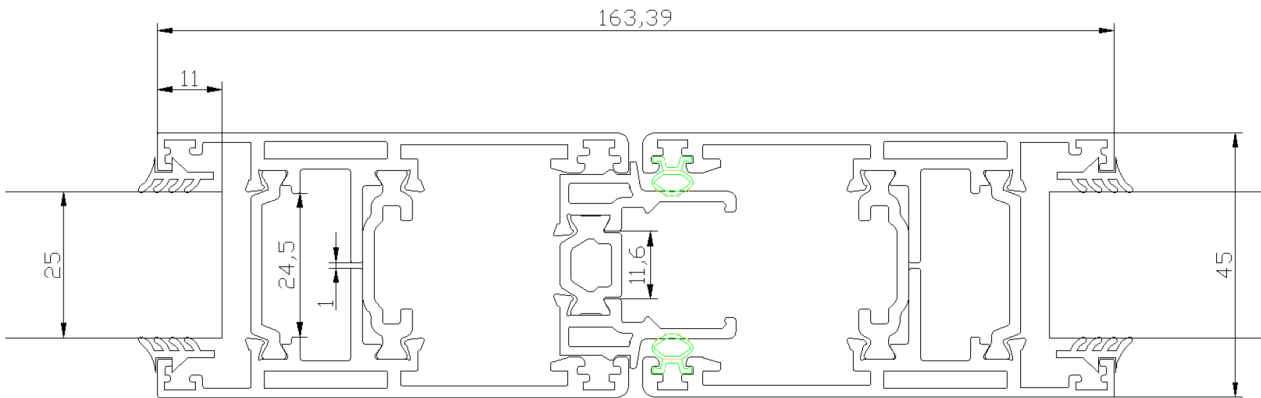


Simulation model (detail), isothermal lines with 0°C externally

$U_f = 3,7$  (3,703) W/m<sup>2</sup>K  
 $b_f = 163,4$  mm

**NRG 4000, Profil #2**

**Drawing** (Source: Customer):

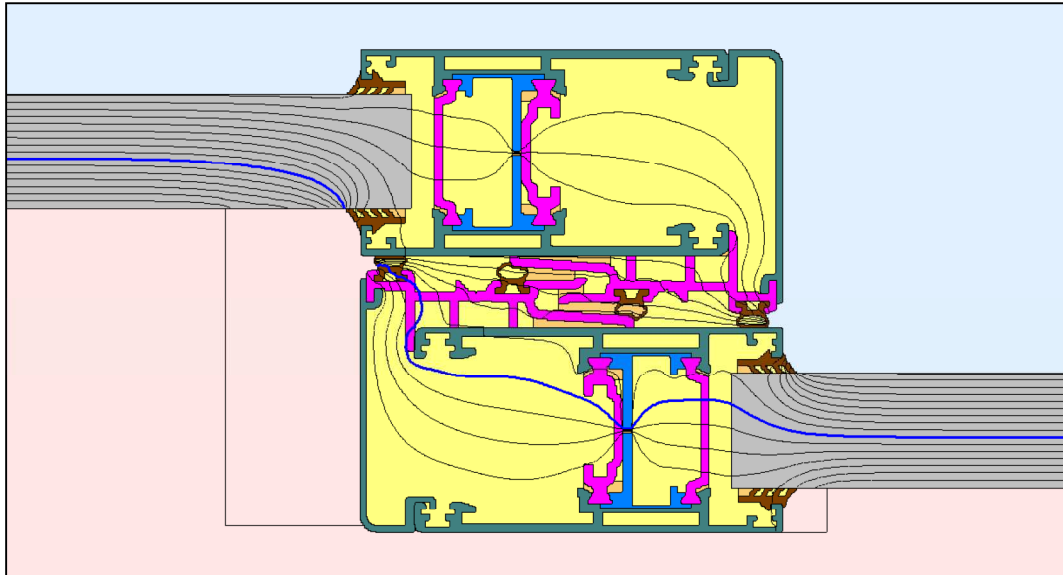
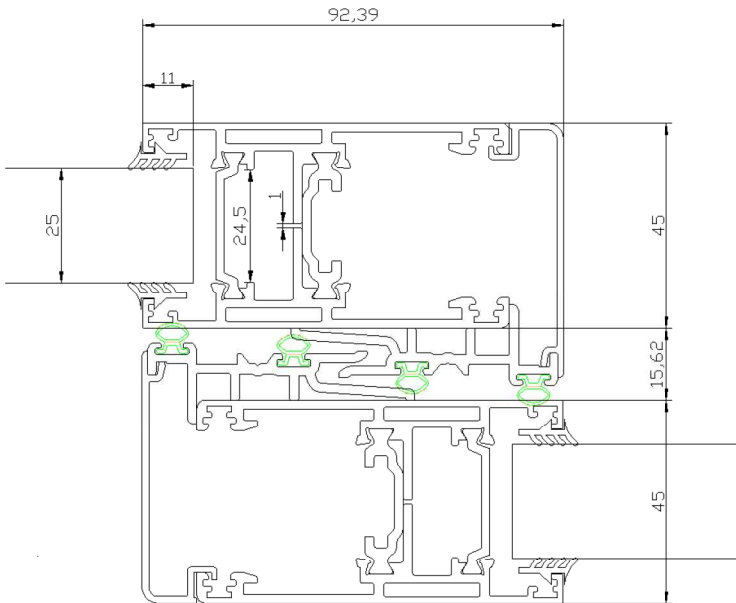


Simulation model (detail), isothermal lines with 0°C externally

$U_f = 4,2$  (4,227) W/m<sup>2</sup>K  
 $b_f = 92,4$  mm

**NRG 4000, Profil #3**

**Drawing** (Source: Customer):

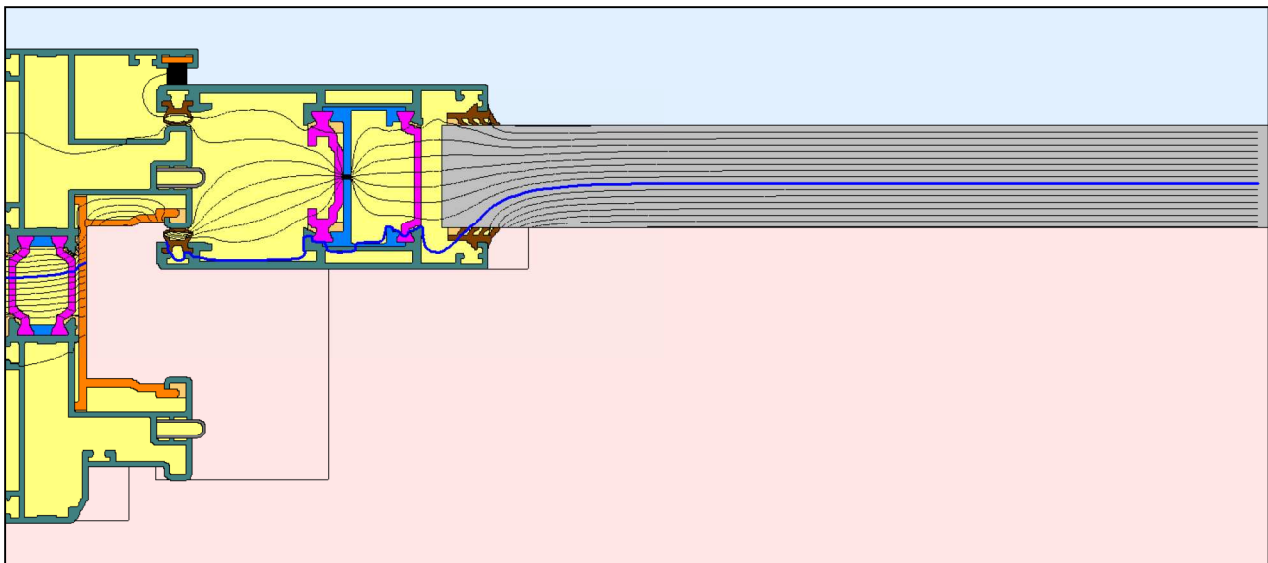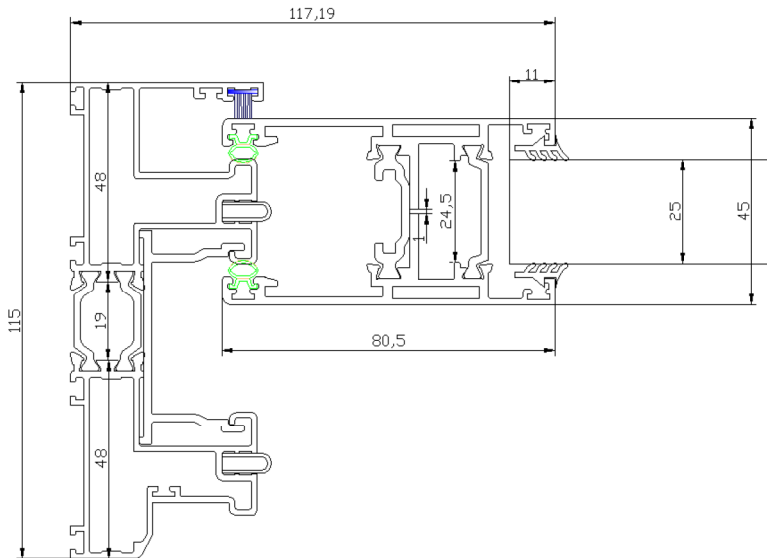

Simulation model (detail), isothermal lines with 0°C externally

$U_f = 4,2 (4,235) \text{ W/m}^2\text{K}$   
 $b_f = 117,2 \text{ mm}$

BAUWERK – Building physics consultancy  
 Rosenheim, 04 June 2011



Dipl.-Ing. (FH) Roland Steinert



**BAUWERK** - Building physics consultancy  
 GERMANY, 83026 Rosenheim, Raublinger Str. 10  
 Phone: 0700-3638 3638, Fax: 0700-3638 0000  
 Email: info@waermeschutz.cc, Internet: www.waermeschutz.cc

BFRC Certified Simulator No. 42 www.bfrc.org

